





2024

ÜRÜN KATALOĞU
PRODUCT CATALOGUE

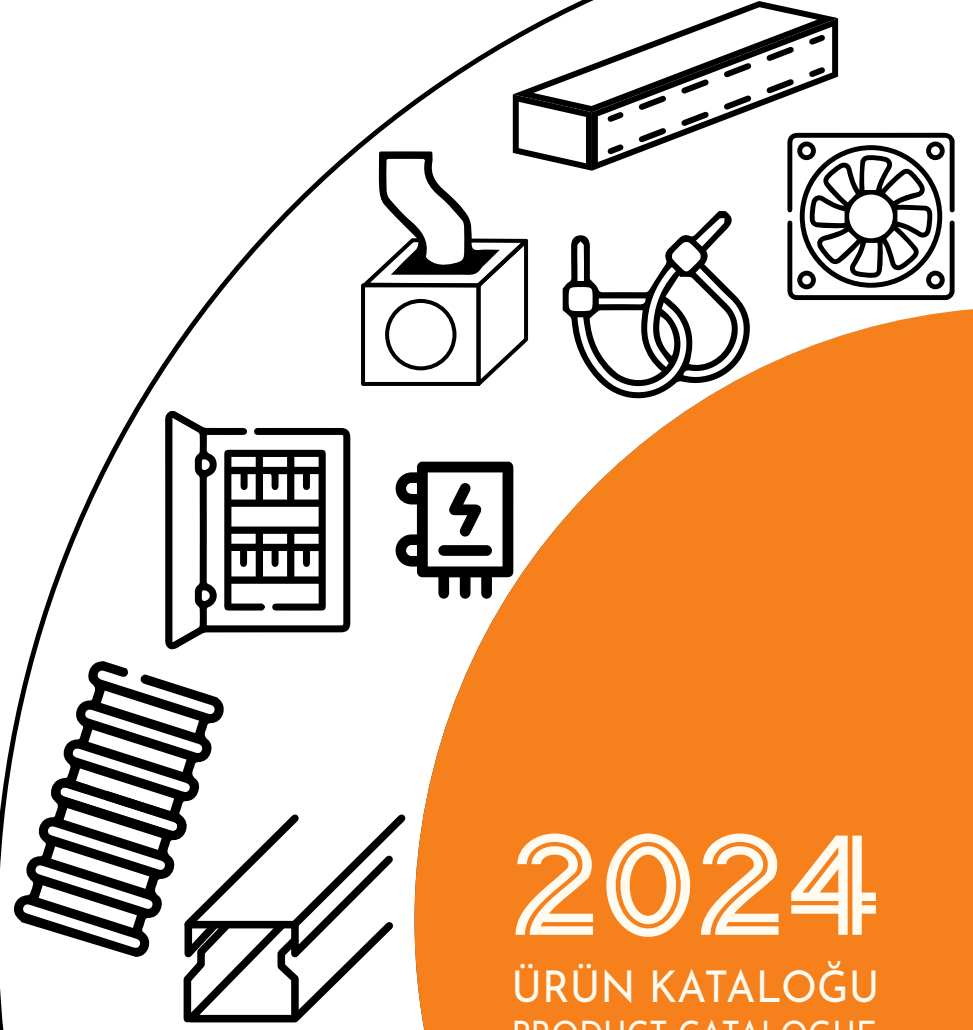

PLASTIC & ELECTRIC

www.sbstrunking.com

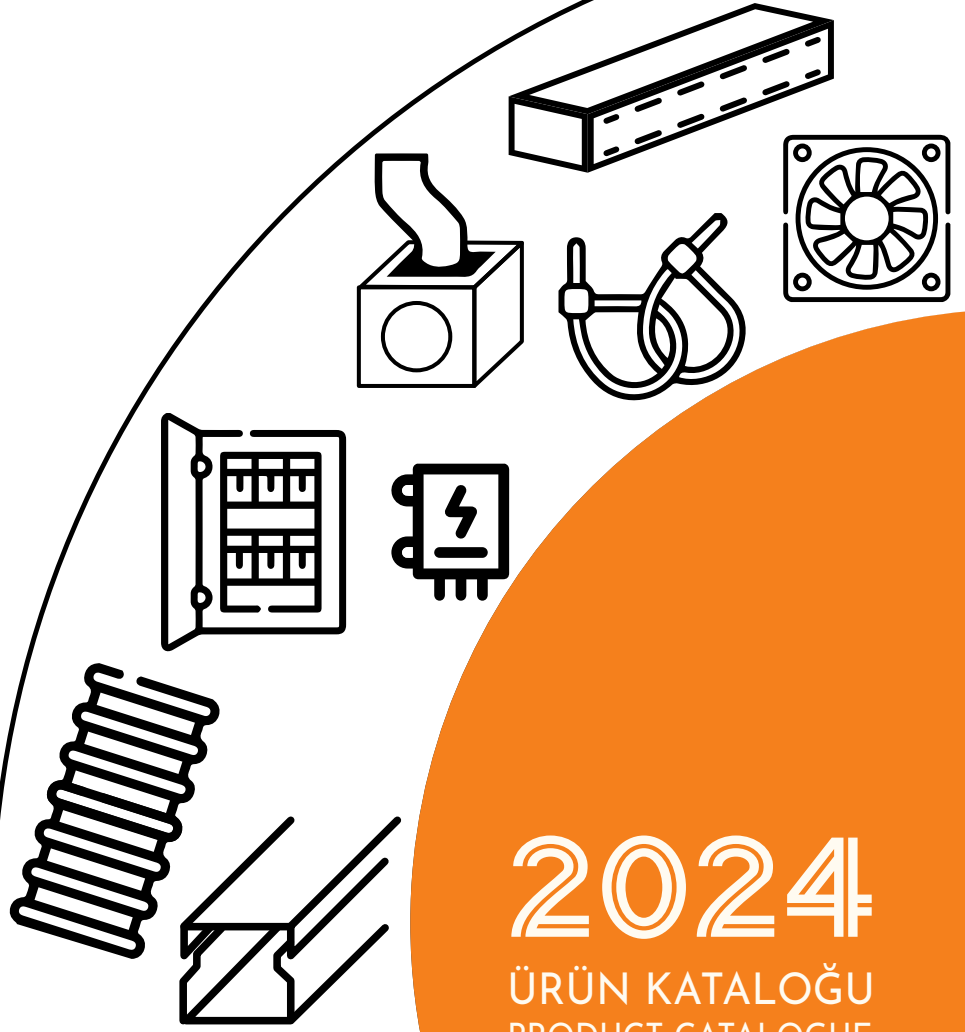




2024

ÜRÜN KATALOĞU
PRODUCT CATALOGUE



PLASTIC & ELECTRIC


www.sbstrunking.com

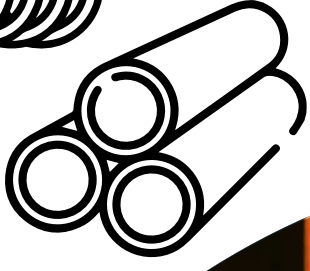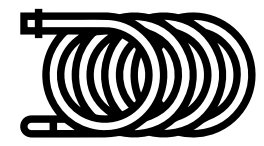

About Us;

SBS Plastik has been meeting consumer needs and demands at global standards for over 22 years in the Electrical Materials industry.

By allocating significant financial resources, the company has reflected a total quality philosophy in its brand with its customer-oriented, trained staff. In this regard, we are exporting to more than 45 countries.

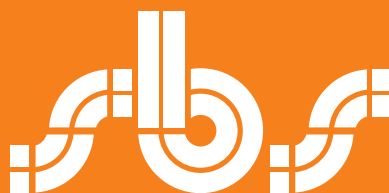


INDEX

BOARDS / PANOLAR	6-10
JUNCTION BOX / BUAT KUTUSU	11
COMBINATION BOX / KOMBİNASYON KUTUSU	12
CABLE TRUNKING / DELİKLİ KABLO KANALI	13-14
FAN SERIES / FAN SERİSİ	15
FILTER AND PANEL HEATERS / FİLTRE VE PANO ISITICISI	16
DISTRIBUTION UNIT / DAĞITIM UNİTESİ	17
MANHOLE / YERALTI BUATI	18
CABLE TRUNKING / KABLO KANALI	20-25
FUSE BOX / SİGORTA KUTUSU	26
CABLE TIE / KABLO BAĞI	27
SOFT HOSE / YUMUŞAK HORTUM	28
CONDUIT / SİRİRAL	29
TERMINAL BLOCK / TERMİNAL	30

ABS ENCLOSURE PANEL

(ABS PANO)

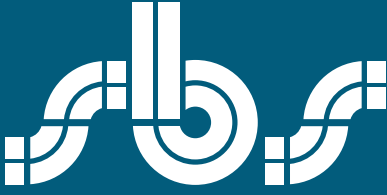

Panels are including metal plate, lock and mounting accessory inside




CODE	INFORMATION	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-1200301	210x280x130 ABS Panel	1	0,008	1,321
SBS-1200303	250x330x130 ABS Panel	1	0,011	1,74
SBS-1200304	250x350x150 ABS Panel	1	0,012	1,74
SBS-1200305	250x350x150 ABS Panel	1	0,014	1,937
SBS-1200306	300x400x170 ABS Panel	1	0,021	2,762
SBS-1200307	300x400x190 ABS Panel	1	0,025	3,041
SBS-1200308	350x500x200 ABS Panel	1	0,036	3,998
SBS-1200309	400x500x170 ABS Panel	1	0,036	4,301
SBS-12003010	400x500x240 ABS Panel	1	0,052	4,835
SBS-12003011	400x600x200 ABS Panel	1	0,050	5,554
SBS-12003012	500x700x250 ABS Panel	1	0,089	9,16
SBS-12003013	500x600x220 ABS Panel	1	0,089	12,57
SBS-12003013-1	750x1000x300 ABS Panel	1	0,130	19

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: ABS Halogen Free
 Kapak hammaddesi: PC / Polycarbonate (Şeffaf kapak)
 Kalite Standardı: EN6070-1, EN6070-24
 Renk: RAL 7035
 Çalışma Sıcaklığı: -40 °C / +70 °C
 Voltaj: 690 V'a kadar
 Maksimum Akım: 800 A'e kadar
 Kapak Açılma Açısı: 180°
 Koruma Sınıfı: IP 65
 IK Derecesi: IK08
 Taban Sacı: 1 mm Galvanizli Sac

Raw Material: ABS Halogen Free
 Door raw material: PC / Polycarbonate (For transparent covers)
 Quality Standart: EN6070-1, EN6070-24
 Color: RAL 7035
 Operation Temperature: -40 °C / +70 °C
 Rated Voltage: Up to 690 V
 Maximum Current: Up to 800 A
 Door Opening Angle: 180°
 Protection Class: IP 65
 IK Degree: IK08
 Mounting Plate: 1 mm Galvanised Steel

"Empowering
Connections,
Enhancing
Lives"

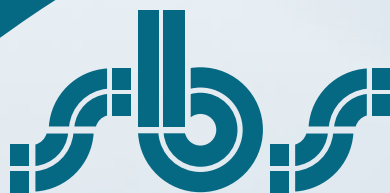

TRANSPARENT PC ABS ENCLOSURE PANEL

(ŞEFFAF KAPAKLI ABS PANO)

CODE	INFORMATION	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-1200315	210x280x130 PC ABS Panel	1	0,009	1,36
SBS-1200317	250x330x130 PC ABS Panel	1	0,012	1,78
SBS-1200318	250x350x150 PC ABS Panel	1	0,014	2,55
SBS-1200319	300x400x170 PC ABS Panel	1	0,023	2,65
SBS-1200320	300x400x190 PC ABS Panel	1	0,027	3,05
SBS-1200321	350x500x200 PC ABS Panel	1	0,040	4,37
SBS-1200322	400x500x170 PC ABS Panel	1	0,054	4,97
SBS-1200323	400x500x240 PC ABS Panel	1	0,053	5,45
SBS-1200324	400x600x200 PC ABS Panel	1	0,091	5,75
SBS-1200325	500x700x250 PC ABS Panel	1	0,037	4,12
SBS-1200326	500x600x220 PC ABS Panel	1	0,072	7,43
SBS-1200327	600x800x260 PC ABS Panel	1	0,133	12,68




Panels are including metal plate, lock and mounting accessory inside




Poliüretan Dökme Conta veya EPDM Conta
Olumsuz Hava Koşullarına Yüksek Dayanım
Asit veya Bazlara Karşı Tam Koruma
Duvar montaj seti içindedir
UV Dayanımı
Nem Dayanımı
Alev Yayımayan

Polyurathane Foam Gasket or EPDM Gasket
High Resistance Adverse Weather Conditions
Full Protection Against Acid and Base
Include wall fixing bracket
UV Resistance
Humidity Resistance
Self-Extinguishing

ADDITIONAL SPESIFICATIONS (EK ÖZELLİKLER)

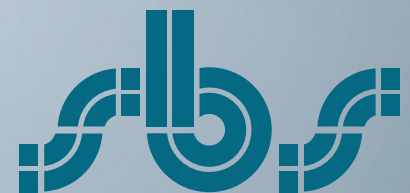

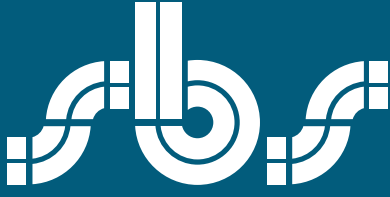

MODULER ABS ENCLOSURE PANEL

(ABS OTOMAT PANOSU)



Panels are including metal plate, lock and mounting accessory inside

CODE	INFORMATION	BOX/PCS	VOLUME (m3)
SBS-1200328	180x240x130 Moduler ABS Panel (1x4)	1	0,080
SBS-1200329	210x280x130 Moduler ABS Panel (1x8)	1	0,009
SBS-1200330	250x330x130 Moduler ABS Panel (2x9)	1	0,012
SBS-1200331	300x400x170 Moduler ABS Panel (2x12)	1	0,023
SBS-1200332	350x500x200 Moduler ABS Panel (3x15)	1	0,040
SBS-1200333	400x500x170 Moduler ABS Panel (3x18)	1	0,054
SBS-1200334	400x600x200 Moduler ABS Panel (3x20)	1	0,091
SBS-1200335	500x700x250 Moduler ABS Panel (4x21)	1	0,037
SBS-1200336	500x600x220 Moduler ABS Panel (70)	1	0,072
SBS-1200337	600x800x260 Moduler ABS Panel (90)	1	0,133

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: ABS Halogen Free
 Kapak hammaddesi: PC / Polycarbonate (Şeffaf kapak)
 Kalite Standardı: EN6070-1, EN6070-24
 Renk: RAL 7035
 Çalışma Sıcaklığı: -40 °C / +70 °C
 Voltaj: 690 V'a kadar
 Maksimum Akım: 800 A'e kadar
 Kapak Açılma Açısı: 180°
 Koruma Sınıfı: IP 65
 IK Derecesi: IK08
 Taban Sacı: 1 mm Galvanizli Sac

Raw Material: ABS Halogen Free
 Door raw material: PC / Polycarbonate (For transparent covers)
 Quality Standart: EN6070-1, EN6070-24
 Color: RAL 7035
 Operation Temperature: -40 °C / +70 °C
 Rated Voltage: Up to 690 V
 Maximum Current: Up to 800 A
 Door Opening Angle: 180°
 Protection Class: IP 65
 IK Degree: IK08
 Mounting Plate: 1 mm Galvanised Steel

"Her
Bağlantıda
Yenilik"



MODULER TRANSPARENT PC ABS PANEL

(ŞEFFAF KAPAKLI ABS OTOMAT PANOSU)

CODE	INFORMATION	BOX/PCS	VOLUME (m3)
SBS-1200338	180x240x130 Moduler PC ABS Panel (1x4)	1	0,080
SBS-1200339	210x280x130 Moduler PC ABS Panel (1x8)	1	0,009
SBS-1200340	250x330x130 Moduler PC ABS Panel (2x9)	1	0,012
SBS-1200341	300x400x170 Moduler PC ABS Panel (2x12)	1	0,023
SBS-1200342	350x500x200 Moduler PC ABS Panel (3x15)	1	0,040
SBS-1200343	400x500x170 Moduler PC ABS Panel (3x18)	1	0,054
SBS-1200344	400x600x200 Moduler PC ABS Panel (3x20)	1	0,091
SBS-1200345	500x700x250 Moduler PC ABS Panel (4x21)	1	0,037
SBS-1200346	500x600x220 Moduler PC ABS Panel (70)	1	0,072
SBS-1200347	600x800x260 Moduler PC ABS Panel (90)	1	0,133





Panels are including metal plate, lock and mounting accessory inside

Poliüretan Dökme Conta veya EPDM Conta
Olumsuz Hava Koşullarına Yüksek Dayanım
Asit veya Bazlara Karşı Tam Koruma
Duvar montaj seti içindedir
UV Dayanımı
Nem Dayanımı
Alev Yayımayan

Polyurathane Foam Gasket or EPDM Gasket
High Resistance Adverse Weather Conditions
Full Protection Against Acid and Base
Include wall fixing bracket
UV Resistance
Humidity Resistance
Self-Extinguishing

ADDITIONAL SPESIFICATIONS (EK ÖZELLİKLER)

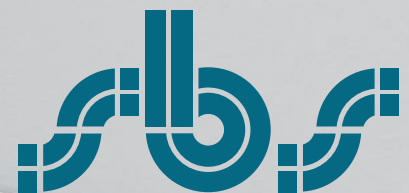

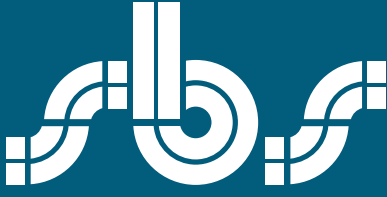

POLYESTER ENCLOSURE PANEL

(POLYESTER PANO)



Panels are including metal plate, lock and mounting accessory inside



CODE	INFORMATION	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-1200275	200x300x120 Polyester Panel	8	0,071	2,4
SBS-1200276	210x320x130 Polyester Panel	8	0,088	1,92
SBS-1200276-1	190x290x120 Polyester Panel	8	0,088	1,5
SBS-1200277	250x300x170 Polyester Panel	6	0,090	2,98
SBS-1200277-1	220x330x170 Polyester Panel	6	0,090	3,5
SBS-1200278	300x400x170 Polyester Panel	4	0,100	4,69
SBS-1200279	350x500x170 Polyester Panel	2	0,067	6,35
SBS-1200280	400x600x200 Polyester Panel	2	0,109	8,96
SBS-1200280-1	400x600x140 Polyester Panel	2	0,109	5,50
SBS-1200280-2	320x660x200 Polyester Panel	1	0,046	9
SBS-1200281	500x700x200 Polyester Panel	1	0,082	11,8
SBS-1200281-1	500x700x140 Polyester Panel	1	0,082	11,35
SBS-1200282	600x800x220 Polyester Panel	1	0,132	16,85

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)


Hammadde: Cam Elyaf Polyester
Kalite Standardı: EN61439, EN60670-1
Renk: RAL 7035
Çalışma Sıcaklığı: -40°C / +70°C
Voltaj: 690 V'a kadar
Maksimum Akım: 800 A'e kadar
Kapak Açılma Açısı: 210°
Koruma Sınıfı: IP 65
IK Derecesi: IK08
Montaj Plakası Materyeli: Galvanizli Sac
Topraklama Sınıfı: Class II
Yanmazlık Dayanımı: V0,V2,B2,A1,A2,B1

Raw Material: Glass Reinforced Polyester
Quality Standart: EN61439, EN60670-1
Color: RAL 7035
Operation Temperature: -40°C / +70°C
Rated Voltage: Up to 690 V
Maximum Current: Up to 800 A
Door Opening Angle: 210°
Protection Class: IP 65
IK Degree: IK08
Mounting Plate Material: Galvanised Steel
Grounding Class: Class II
Fire Resistance: V0,V2,B2,A1,A2,B1

Polyurethane Foam Gasket or EPDM Gasket
 High Resistance Adverse Weather Conditions
 Full Protection Against Acid and Base
 UV Resistance
 Humidity Resistance
 Self-Extinguishing

Poliüretan Dökme Conta veya EPDM Conta
 Olumsuz Hava Koşullarına Yüksek Dayanım
 Asit veya Bazlara Karşı Tam Koruma
 UV Dayanımı
 Nem Dayanımı
 Alev Yayımayan

ADDITIONAL SPECIFICATIONS (EK ÖZELLİKLER)

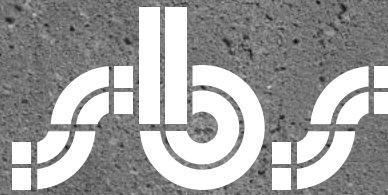

ABS JUNCTION BOX

(ABS BUAT KUTULARI)



CODE	INFORMATION	BOX/PCS
SBS-2101147	90x43x40 Plastic Junction Box (press fit cover - IP55)	456
SBS-2101148	75x75x40 Plastic Junction Box (press fit cover - IP55)	280
SBS-2101149	85x85x50 Plastic Junction Box (press fit cover - IP55)	224
SBS-2102150	70x40 Plastic Junction Box (press fit cover - IP44)	60
SBS-2102151	85x45 Plastic Junction Box (press fit cover - IP44)	40
SBS-2102152	80x80x40 Plastic Junction Box (press fit cover - IP44)	40
SBS-2102153	80x120x50 Plastic Junction Box (stainless steel screw - IP54)	22
SBS-2102154	100x100x50 Plastic Junction Box (stainless steel screw - IP54)	18
SBS-2102155	110x110x70 Plastic Junction Box (plastic screw - IP67)	10
SBS-2102156	150x110x70 Plastic Junction Box (stainless steel screw - IP54)	9
SBS-2102157	150x150x70 Plastic Junction Box (stainless steel screw - IP54)	10
SBS-2102158	190x145x80 Plastic Junction Box (stainless steel screw - IP54)	10
SBS-2102159	250x200x90 Plastic Junction Box (plastic screw - IP67)	12
SBS-2102160	310x230x130 Plastic Junction Box (plastic screw - IP67)	6
SBS-2102161	80x120x120 Plastic Junction Box (stainless steel screw - IP54)	35
SBS-2102162	100x100x120 Plastic Junction Box (stainless steel screw - IP54)	36
SBS-2102163	150x110x140 Plastic Junction Box (stainless steel screw - IP54)	16
SBS-2102164	190x145x140 Plastic Junction Box (plastic screw - IP67)	10
SBS-2102165	250x200x160 Plastic Junction Box (plastic screw - IP67)	6
SBS-2102166	310x230x180 Plastic Junction Box (plastic screw - IP67)	6

ADDITIONAL SPESIFICATIONS

Impact Resistant
IK 10
With Press fit Cover
Knock-out Entries
Glow wire test 650°C
High Resistance Adverse Weather Conditions
Full Protection Against Acid and Base
UV Resistance
Humidity Resistance
Self-extinguishing

(EK ÖZELLİKLER)

Darbelere Dayanıklı
IK 10
Presle Geçmeli Kapak
Kızaran tel testi 650°C
Olumsuz Hava Koşullarına Yüksek Dayanım
Asit veya Bazlara Karşı Tam Koruma
UV Dayanımı
Nem Dayanımı, Alev Yayımayan

(GENEL ÖZELLİKLER)


Ham madde: Abs Halogen Free
Kalite Standardı: En60670-1, En60670-24
Renk: Ral 7035 Gri
Çalışma Sıcaklığı: -25°C / +60°C
Voltaj: 690 V'a Kadar
Maksimum Akım: 800 A'e Kadar
Raw Material: Abs Halogen Free
Quality Standart: En60670-1, En60670-24
Color: Ral 7035 Gray
Operation Temperature: -25°C / +60°C
Rated Voltage: Up To 690v
Maximum Current: Up To 800a

ABS TRANSPARENT COVER JUNCTION BOX

(ABS ŞEFFAF KAPAKLI BUAT KUTULARI)



CODE	INFORMATION	BOX/PCS
SBS-2102167	125x230x80 Plastic Junction Box (stainless steel screw - IP54)	16
SBS-2102168	125x350x80 Plastic Junction Box (stainless steel screw - IP54)	20
SBS-2102169	125x460x80 Plastic Junction Box (stainless steel screw - IP54)	8
SBS-2102170	150x110x70 Transparent Cover Plastic Junction Box (stainless steel screw - IP54)	9
SBS-2102171	150x150x70 Transparent Cover Plastic Junction Box (stainless steel screw - IP54)	10
SBS-2102172	190x145x80 Transparent Cover Plastic Junction Box (stainless steel screw - IP54)	10
SBS-2102173	250x200x90 Transparent Cover Plastic Junction Box (plastic screw - IP67)	12
SBS-2102174	310x230x130 Transparent Cover Plastic Junction Box (plastic screw - IP67)	6
SBS-2102175	150x110x140 Transparent Cover Plastic Junction Box (plastic screw - IP67)	16
SBS-2102176	190x145x140 Transparent Cover Plastic Junction Box (plastic screw - IP67)	10
SBS-2102177	250x200x160 Transparent Cover Plastic Junction Box (plastic screw - IP67)	6
SBS-2102178	310x230x180 Transparent Cover Plastic Junction Box (plastic screw - IP67)	6

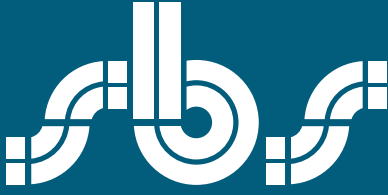

INDUSTRIAL COMBINATION BOX (ENDÜSTRİYEL KOMBİNASYON KUTULARI)



CODE	INFORMATION	BOX/PCS	DIN MODULE
SBS-2102200	130x240x105 Industrial Combination Box (With Angle)	14	6M
SBS-2102201	230x300x115 Industrial Combination Box (With Angle)	6	11M
SBS-2102202	250x360x125 Industrial Combination Box (With Angle)	4	12M
SBS-2102203	130x240x100 Industrial Combination Box (Plain Design)	14	6M
SBS-2102204	180x360x115 Industrial Combination Box (Plain Design)	7	6M
SBS-2102205	230x300x115 Industrial Combination Box (Plain Design)	6	11M
SBS-2102206	130x350x105 Industrial Combination Box (Plain Design)	10	6M
SBS-2102207	130x460x105 Industrial Combination Box (Plain Design)	8	6M
SBS-2102208	330x520x155 Industrial Combination Box (Plain Design)	4	16M
SBS-2102209	335x330x155 Industrial Combination Box (Plain Design)	1	16M
SBS-2102210	330x685x155 Industrial Combination Box (Plain Design)	1	32M

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Ham madde: ABS Halogen Free
Sigorta kapağı: PC Halogen Free
Kızaran tel testi: 650 C°
Koruma Sınıfı: IP54
IK Derecesi: IK10
 Duvar montaj seti içindedir
 Olumsuz hava koşullarına dayanıklıdır
 Asit ve Bazlara karşı tam korumalıdır
 Nem dayanımı vardır

Raw material: ABS Halogen Free
Fuse holder over: PC Halogen Free
Glowwire test: 650 C°
Protection Class: IP54
IK Degree: IK10
 Include wall fixing bracket
 High resistance to adverse weather conditions
 Full protection against acid and base
 Humidity resistance

"Elevating Safety,
Embracing
Quality"



INDUSTRIAL CABLE TRUNKING

(GRİ PVC DELİKLİ KABLO KANALI)

GRAY

BLUE

WHITE

CODE	INFORMATION	BOX/MT	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-3025025	25x25 PVC Slotted Type Cable Trunking	100	50	0,054	16,4
SBS-3025040	25x40 PVC Slotted Type Cable Trunking	84	42	0,094	20,2
SBS-3025060	25x60 PVC Slotted Type Cable Trunking	68	34	0,094	20,9
SBS-3040040	40x40 PVC Slotted Type Cable Trunking	80	40	0,094	19,7
SBS-3040060	40x60 PVC Slotted Type Cable Trunking	60	30	0,094	21,8
SBS-3040080	40x80 PVC Slotted Type Cable Trunking	40	20	0,092	23,1
SBS-3060040	60x40 PVC Slotted Type Cable Trunking	48	24	0,094	27,2
SBS-3060060	60x60 PVC Slotted Type Cable Trunking	32	16	0,094	25,8
SBS-3060080	60x80 PVC Slotted Type Cable Trunking	24	12	0,092	22,8
SBS-3080060	80x60 PVC Slotted Type Cable Trunking	24	12	0,094	20,6
SBS-3080080	80x80 PVC Slotted Type Cable Trunking	24	12	0,092	19,0
SBS-30100060	100x60 PVC Slotted Type Cable Trunking	24	12	0,094	16,0


GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: PVC
Delikler arası mesafe: 4/6/4 + 5/7/5
Çalışma Sıcaklığı: -25°C to +65 °C
Standart uzunluk: 2 metre
UV dayanımı: Asit ve yağlara karşı dayanıklı
 Aşınmaya dayanıklı
 EN 50085-2-3 standartlarına göre üretilmiştir
 Şeritli kapak seçeneği vardır

Raw Material: PVC
Narrow slots: 4/6/4 + 5/7/5
Operation Temperature: -25°C to +65 °C
Standard lenght: 2 meters
UV resistant: Resistant to acids, oils and greases
 Corrosion resistant
 Standards EN 50085-2-3
 Cover with lines options is available



Tabanındaki delikler sayesinde hızlı ve kolay montaj sağlar.
 Holes in the base allows quick and easy installation.



Tırmakları kırarak dilediğiniz yerden T bağlantısı yapabilirsiniz.
 T connections can be made by breaking side nails.



Kablo çıkışları için düzenli aralıklar.
 Regular space intervals for cable output.



Önceden belirlenmiş kırılma hatları sayesinde kanal birleştirme ve kablo çıkışı yapabilirsiniz.
 With its predesigned breaking lines, vast unit of cable joint and cable outputs




Ekstra dayanıklılık sağlayan kapak ve gövde birleşimi.
 The combination of the body and cover parts provide extra durability.




Kesici aletlerle kolayca dilediğiniz ebatla kesebilirsiniz.
 With special cutting tools, you can easily cut the trunking as your desired sizes.





INDUSTRIAL CABLE TRUNKING WITH ADHESIVE TAPE


(YAPIŞKAN BANTLI PVC DELİKLİ KABLO KANALI)

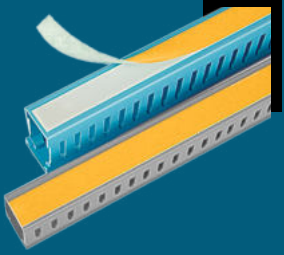

CODE	INFORMATION	BOX/PCS	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-4025025	25X25 PVC Slotted Type Cable Trunking Adhesive Tape Grey	100	100	0,054	24,8
SBS-4025040	25X40 PVC Slotted Type Cable Trunking Adhesive Tape Grey	84	84	0,094	24,8
SBS-4025060	25X60 PVC Slotted Type Cable Trunking Adhesive Tape Grey	68	68	0,094	212,9
SBS-4040040	40X40 PVC Slotted Type Cable Trunking Adhesive Tape Grey	80	80	0,094	20,7
SBS-4040060	40X60 PVC Slotted Type Cable Trunking Adhesive Tape Grey	60	60	0,094	0,0
SBS-4040080	40X80 PVC Slotted Type Cable Trunking Adhesive Tape Grey	40	40	0,092	20,0
SBS-4325025	25X25 PVC Slotted Type Cable Trunking Adhesive Tape Blue	100	100	0,054	24,8
SBS-4325040	25X40 PVC Slotted Type Cable Trunking Adhesive Tape Blue	84	84	0,094	24,8
SBS-4325060	25X60 PVC Slotted Type Cable Trunking Adhesive Tape Blue	68	68	0,094	212,9
SBS-4340040	40X40 PVC Slotted Type Cable Trunking Adhesive Tape Blue	80	80	0,094	20,7
SBS-4340060	40X60 PVC Slotted Type Cable Trunking Adhesive Tape Blue	60	60	0,094	0,0
SBS-4340080	40X80 PVC Slotted Type Cable Trunking Adhesive Tape Blue	40	40	0,092	19,7
SBS-4625025	25X25 PVC Slotted Type Cable Trunking Adhesive Tape White	100	100	0,054	23,1
SBS-4625040	25X40 PVC Slotted Type Cable Trunking Adhesive Tape White	84	84	0,094	27,2
SBS-4625060	25X60 PVC Slotted Type Cable Trunking Adhesive Tape White	68	68	0,094	25,8
SBS-4640040	40X40 PVC Slotted Type Cable Trunking Adhesive Tape White	80	80	0,094	22,8
SBS-4640060	40X60 PVC Slotted Type Cable Trunking Adhesive Tape White	60	60	0,094	19,0
SBS-4640080	40X80 PVC Slotted Type Cable Trunking Adhesive Tape White	40	40	0,092	16,0



Tabanındaki delikler sayesinde hızlı ve kolay montaj sağlar.
Holes in the base allows quick and easy installation.



Tırnakları kırarak dilediğiniz yerden T bağlantısı yapabilirsiniz.
T connections can be made by breaking side nails.



Kablo çıkışları için düzenli aralıklar.
Regular space intervals for cable output.



Önceden belirlenmiş kırılma hatları sayesinde kanal birleştirme ve kablo çıkışı yapabilirsiniz.
With its pre-designed breaking lines, vast unit of cable joint and cable outputs.




Ekstra dayanıklılık sağlayan kapak ve gövde birleşimi.
The combination of the body and cover parts provide extra durability.



Kesici aletlerle kolayca dilediğiniz ebatta kesebilirsiniz.
With special cutting tools, you can easily cut the trunking as your desired sizes.

INDUSTRIAL CABLE TRUNKING (WITH LINE)

(PVC DELİKLİ KABLO KANALI ŞERİTLİ)

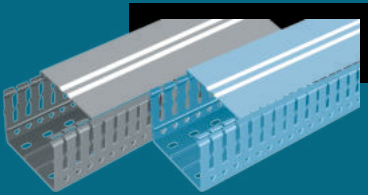

CODE	INFORMATION	BOX/MT	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-5025025	25X25 PVC Slotted Type Cable Trunking Grey With Lines	50	100	0,054	19,7
SBS-5025040	25X40 PVC Slotted Type Cable Trunking Grey With Lines	42	84	0,094	21,8
SBS-5025060	25X60 PVC Slotted Type Cable Trunking Grey With Lines	34	68	0,094	23,1
SBS-5040040	40X40 PVC Slotted Type Cable Trunking Grey With Lines	40	80	0,094	27,2
SBS-5040060	40X60 PVC Slotted Type Cable Trunking Grey With Lines	30	60	0,094	25,8
SBS-5040080	40X80 PVC Slotted Type Cable Trunking Grey With Lines	20	40	0,092	22,8
SBS-5060060	60X60 PVC Slotted Type Cable Trunking Grey With Lines	16	32	0,094	19,0
SBS-5060080	60X80 PVC Slotted Type Cable Trunking Grey With Lines	12	24	0,092	16,0
SBS-5325025	25X25 PVC Slotted Type Cable Trunking Blue With Lines	50	100	0,054	19,7
SBS-5325040	25X40 PVC Slotted Type Cable Trunking Blue With Lines	42	84	0,094	21,8
SBS-5325060	25X60 PVC Slotted Type Cable Trunking Blue With Lines	34	68	0,094	23,1
SBS-5340040	40X40 PVC Slotted Type Cable Trunking Blue With Lines	40	80	0,094	27,2
SBS-5340060	40X60 PVC Slotted Type Cable Trunking Blue With Lines	30	60	0,094	25,8
SBS-5340080	40X80 PVC Slotted Type Cable Trunking Blue With Lines	20	40	0,092	22,8
SBS-5360060	60X60 PVC Slotted Type Cable Trunking Blue With Lines	16	32	0,094	19,0
SBS-5360080	60X80 PVC Slotted Type Cable Trunking Blue With Lines	12	24	0,092	16,0

FAN SERIES

FAN SERİSİ

INDUSTRIAL FAN SERIES

(ENDÜSTRİYEL FAN SERİSİ)



CODE	INFORMATION	BOX/PCS
SBS-FM3-CTF	300 m3, Quick connection, 230V-50/60Hz	1
SBS-FM4-CTF	400 m3, Quick connection, 230V-50/60Hz	1
SBS-FM5-CTF	470 m3, Quick connection, 230V-50/60Hz	1
SBS-FM6-CTF	600 m3, Quick connection, 230V-50/60Hz	1
SBS-FM10-CTF	1000 m3, Quick connection, 230V-50/60Hz	1

Hammadde: ABS
 Kalite standardı: IP54
 Çalışma Sıcaklığı: 10°C to +70°C
 Yanmazlık standardı: UL94 and V-0
 Güç kaynağı: 230V 50-60Hz
 Elektrik bağlantısı: 3-Pole terminal 25mm2
 Kullanım Süresi: 50000 saat
 Akış yönü: İçeriden dışarıya doğru
 Aşırı akım koruması: Termal
 Poliüretan dökme contalıdır

Raw material: ABS
 Protection class: IP54
 Operating temperature: 10°C to +70°C
 Flammability standart: UL94 and V-0
 Power supply: 230V 50-60Hz
 Electrical connection: 3-Pole terminal 25mm2
 Service life: 50000 h
 Flow direction: Inside-out
 Overcurrent protection: Thermal
 Polyurethane foam gasket

GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)


Hammadde: ABS
 Kalite standardı: IP54 - Class I.
 Renk: RAL7035
 Çalışma Sıcaklığı: 10°C to +70°C
 Yanmazlık standardı: UL94 and V-0
 Güç kaynağı: 230V 50-60Hz
 Elektrik bağlantısı: 3-Pole terminal 25mm2
 Kullanım Süresi: 50000 saat
 Akış yönü: Dışarıdan içeriye doğru
 Aşırı akım koruması: Termal
 Poliüretan dökme contalıdır


Raw material: ABS
 Protection class: IP54 - Class I.
 Colour: RAL7035
 Operating temperature: 10°C to +70°C
 Flammability standart: UL94 and V-0
 Power supply: 230V 50-60Hz
 Electrical connection: 3-Pole terminal 25mm2
 Service life: 50000 h
 Flow direction: Outside-in
 Overcurrent protection: Thermal
 Polyurethane foam gasket

INDUSTRIAL FAN SERIES WITH FILTER

(FİLTRELİ ENDÜSTRİYEL FAN SERİSİ)

CODE	INFORMATION	BOX/PCS
SBS-MAFM-220	220V AC,Fan 80x80x38 ,110x110 filter	1
SBS-MAFM-221	220V AC,Fan 120x120x38,160x160 filter	1
SBS-MAFM-222	220V AC,Fan 120x120x38,210x210 filter	1
SBS-MAFM-223	220V AC,Fan 120x120x38,260x260 filter	1
SBS-MAFM-224	220V AC,Fan 170x150x55 ,260x260 filter	1
SBS-MAFM-225	220V AC,Fan 172x150x51 ,260x260 filter	1
SBS-MAFM-226	220V AC,Fan 225x225x80 ,260x260 filter	1
SBS-MAFM-227	220V AC,Fan 220x60,325x325 filter	1
SBS-MAFM-228	220V AC,Fan 280x280x80,325x325 filter	1
SBS-MFAM-241	24V DC,Fan 80x80x25,110x110 filter	1
SBS-MFAM-242	24V DC,Fan 120x120x38 ,160x160 filter	1
SBS-MFAM-243	24V DC,Fan 120x120x38,260x260 filter	1
SBS-MFAM-244	24V DC,Fan 225x225x80,260x260 filter	1
SBS-MFAM-245	24V DC,Fan 172x150x51 ,260x260 filter	1
SBS-MFAM-246	24V DC,Fan 280x280x80 ,325x325 filter	1
SBS-MFAM-110	110V AC,Fan 80x80x25,110x110 filter	1
SBS-MFAM-111	110V AC,Fan 120x120x38 ,160x160 filter	1
SBS-MFAM-112	110V AC,Fan 172x150x51 ,260x260 filter	1
SBS-MFAM-113	110V AC,Fan 170x150x55 ,260x260 filter	1
SBS-MFAM-114	110V AC,Fan 225x225x80 ,260x260 filter	1

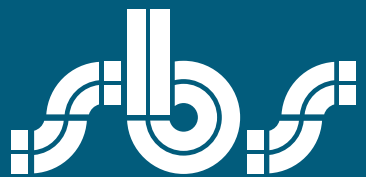

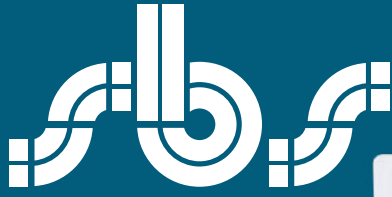

FILTER AND PAPER HOLDER

(FİLTRE VE KAĞIT TUTUCULAR)

CODE	INFORMATION	BOX/PCS
SBS-MFM-110	110X110,Gray	1
SBS-MFM-160 G	160x160,Gray	1
SBS-MFM-210	210x210,Gray	1
SBS-MFM-250	260x260,Gray	1
SBS-MFM-325	325x325,Gray	1
SBS-MPC-A4	A4 Project Paper holder	1
SBS-MPC-A5	A5 Project paper holder	1

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: ABS
 Kalite standardı: IP54 - Class I.
 Renk: RAL7035
 Çalışma Sıcaklığı: -10°C to +70°C
 Yanmazlık standardı: UL94 and V-0
 Poliüretan dökme contalıdır

Raw material: ABS
 Protection class: IP54 - Class I.
 Colour: RAL7035
 Operating temperature: -10°C to +70°C
 Flammability standard: UL94 and V-0
 Polyurethane foam gasket

Radyatör hammadde: Alüminyum profil, anodlanmış
 Kalite standardı: IP20-Class II.
 Çalışma Sıcaklığı: -45°C to +70°C
 Elektrik bağlantısı: 3-Pole terminal 25mm2
 Aşırı akım koruması: Elektronik termal aşırı yükü

Radiator raw material: Aluminum Profile, Anodized
 Protection class: IP20-Class II.
 Operating temperature: -45°C to +70°C
 Electrical connection: 3-Pole terminal 25mm2
 Overcurrent protection: Electronic thermal overload
 Mounting rail: 35mm x 7,5mm DIN rail

ENCLOSURE PANEL HEATERS

(PANO ISITICILARI)



CODE	INFORMATION	BOX/PCS
SBS-MPI 15W	110-250VAC ,15W Panel heater with cable	1
SBS-MPI 30W	110-250VAC ,30W Panel heater with cable	1
SBS-MPI 45W	110-250VAC ,45W Panel heater with terminal blocks (Bornera)	1
SBS-MPI 60W	110-250VAC ,60W Panel heater with terminal blocks (Bornera)	1
SBS-MPI 75W	110-250VAC ,75W Panel heater with terminal blocks (Bornera)	1
SBS-MPI 100W	110-250VAC ,100W Panel heater with terminal blocks (Bornera)	1
SBS-MPI 150W	110-250VAC ,150W Panel heater with terminal blocks (Bornera)	1
SBS-MPI 30W	110-250VAC ,30W Panel heater with terminal blocks (Bornera)	1
SBS-MFPI 250W	250 W Panel heater	1
SBS-MFPI 400W	400 W Panel heater	1
SBS-MFPI 1040W	220-240VAC ,780-1040W Panel heater with ventilator	1

DAĞITIM ÜNİTELERİ

DISTRIBUTION UNIT

DISTRIBUTION UNIT (DAĞITIM ÜNİTELERİ)

SINGLE POLE DISTRIBUTION UNITS 125A - 160A (WITHOUT COVER)

THREE POLES DISTRIBUTION UNIT 80A - 125A - 160A

CODE	INFORMATION	BOX/PCS
SBS-DU 125107	2+5 HOLE	50
SBS-DU 125110	2+8 HOLE	40
SBS-DU 125112	2+10 HOLE	30
SBS-DU 125115	2+13 HOLE	30
SBS-DU 125120	2+18 HOLE	20
SBS-DU 125122	2+20 HOLE	20
SBS-DU 125125	2+23 HOLE	20


CODE	INFORMATION	BOX/PCS
SBS-DU 080307	2+5 HOLE	15
SBS-DU 080310	2+8 HOLE	10
SBS-DU 080312	2+10 HOLE	10
SBS-DU 080315	2+13 HOLE	10
SBS-DU 080320	2+18 HOLE	6
SBS-DU 080322	2+20 HOLE	6
SBS-DU 080325	2+23 HOLE	6

TWO POLES DISTRIBUTION UNITS 80A - 125A

FOUR POLES DISTRIBUTION UNIT 80A - 125A - 160A

CODE	INFORMATION	BOX/PCS
SBS-DU 080207	2+5 HOLE	30
SBS-DU 080210	2+8 HOLE	20
SBS-DU 080212	2+10 HOLE	20
SBS-DU 080215	2+13 HOLE	20
SBS-DU 080220	2+18 HOLE	10
SBS-DU 080222	2+20 HOLE	10
SBS-DU 080225	2+23 HOLE	10

CODE	INFORMATION	BOX/PCS
SBS-DU 080407	2+5 HOLE	15
SBS-DU 080410	2+8 HOLE	10
SBS-DU 080412	2+10 HOLE	10
SBS-DU 080415	2+13 HOLE	10
SBS-DU 080420	2+18 HOLE	6
SBS-DU 080422	2+20 HOLE	6
SBS-DU 080425	2+23 HOLE	6

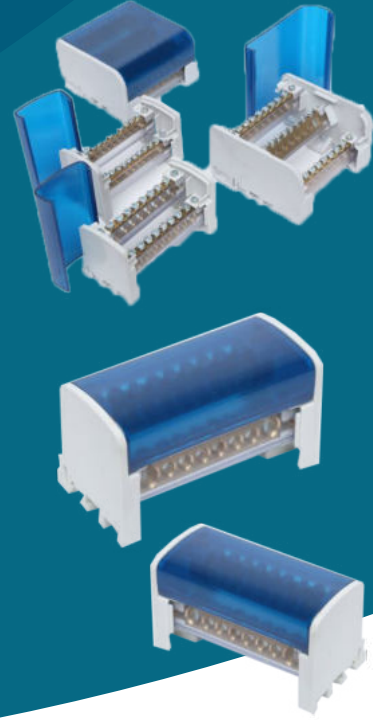

GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)



Hammadde: Galvanize
Kalınlık: $\pm 0,9 - 1$ cm
Delikli ve deliksiz
seçenekler mevcuttur
1 ve 2 metre
seçenekleri mevcuttur

Raw material: Galvanized
Thickness: $\pm 0,9 - 1$ cm
Perforated and unperforated
options are available
1 meter and 2 meters
options are available



DIN RAIL

(OTOMAT RAYI)

CODE	INFORMATION	BOX/MT	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-20010	35x7,5 Galvanize DIN Rail (1 Meter / Slotted)	25	25	0,011	8,3
SBS-20015	35x7,5 Galvanize DIN Rail (2 Meter / Slotted)	50	50	0,020	15,7
SBS-20011	35x7,5 Galvanize DIN Rail (1 Meter / Unslotted)	25	25	0,011	8,3
SBS-20016	35x7,5 Galvanize DIN Rail (2 Meter / Unslotted)	50	50	0,020	15,7
SBS-20050	35x15 Galvanize DIN Rail (1 Meter / Slotted)	20	20	0,011	
SBS-20055	35x15 Galvanize DIN Rail (2 Meter / Slotted)	40	40	0,020	
SBS-20051	35x15 Galvanize DIN Rail (1 Meter / Unslotted)	20	20	0,011	
SBS-20056	35x15 Galvanize DIN Rail (2 Meter / Unslotted)	40	40	0,020	

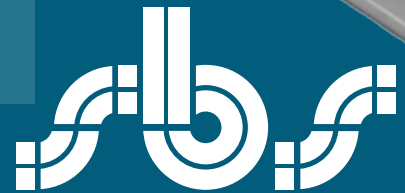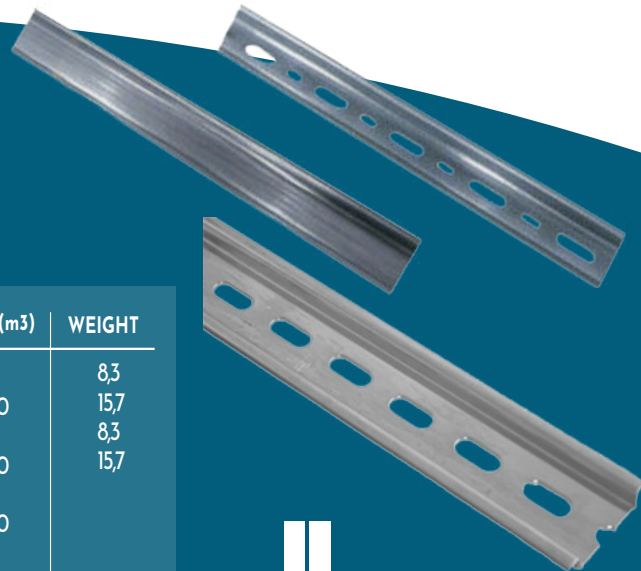

PLASTIC MANHOLE (PLASTİK YERALTI BUATLARI)

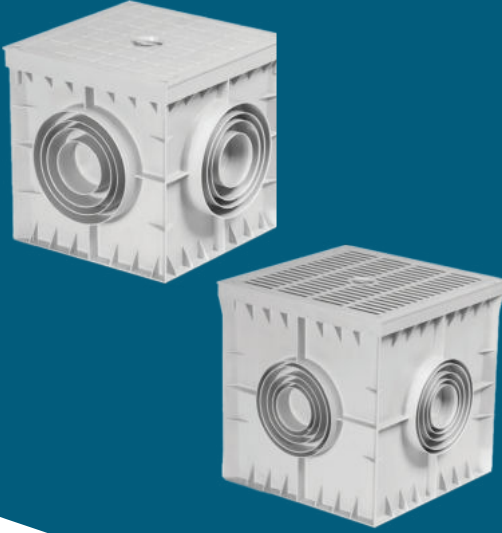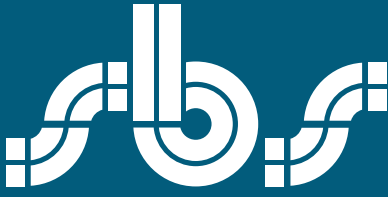


CODE	INFORMATION	BOX/PCS	VOLUME (m3)
SBS-1400450	20x20x20 Manhole (Case & Cover)	1	0,008
SBS-1400451	20x20x20 Standart Manhole Cover	1	-
SBS-1400452	20x20x20 Grilled Manhole Cover	1	-
SBS-1400453	20x20x20 Standart Manhole Cover (Green Colour)	1	-
SBS-1400454	20x20x20 Grilled Manhole Cover (Green Colour)	1	-
SBS-1400475	30x30x30 Manhole (Case & Cover)	1	0,027
SBS-1400476	30x30x30 Standart Manhole Cover	1	-
SBS-1400477	30x30x30 Grilled Manhole Cover	1	-
SBS-1400478	30x30x30 Standart Manhole Cover (Green Colour)	1	-
SBS-1400479	30x30x30 Grilled Manhole Cover (Green Colour)	1	-
SBS-1400500	40x40x40 Manhole (Case & Cover)	1	0,064
SBS-1400501	40x40x40 Standart Manhole Cover	1	-
SBS-1400502	40x40x40 Grilled Manhole Cover	1	-
SBS-1400503	40x40x40 Standart Manhole Cover (Green Colour)	1	-
SBS-1400504	40x40x40 Grilled Manhole Cover (Green Colour)	1	-
SBS-1400550	55x55x50 Manhole (Case & Cover)	1	0,151
SBS-1400551	55x55x50 Standart Manhole Cover	1	-
SBS-1400552	55x55x50 Grilled Manhole Cover	1	-
SBS-1400553	55x55x50 Standart Manhole Cover (Green Colour)	1	-
SBS-1400554	55x55x50 Grilled Manhole Cover (Green Colour)	1	-
SBS-1400555	50x50x50 Manhole (Case & Cover)	1	0,130
SBS-1400556	50x50x50 Standart Manhole Cover	1	-
SBS-1400557	50x50x50 Standart Manhole Cover (Green Colour)	1	-

GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: ABS
 Kalite standardı: A15-B125
 Yük Kapasitesi: 8.5 Kn.
 Koruma Sınıfı: IP65
 IK Derecesi: IK08
 Kimyasal direnç
 Kolay montaj
 Farklı renk seçenekleri mevcuttur


Raw material: ABS
 Quality Standard: A15-B125
 Load Capacity: 8.5 Kn.
 Protection Class: IP65
 IK Degree: IK08
 High resistance to chemical
 Easy installation
 Different colour options are available

"Engineering
Excellence,
Globally
Recognized"

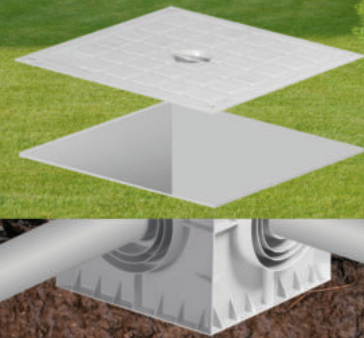



PVC SYSTEM CABLE TRUNKING (PVC SİSTEM KABLO KANALI)

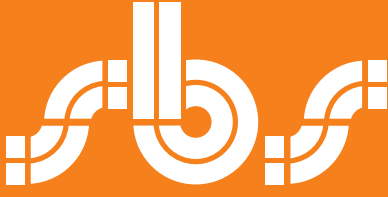

CODE	INFORMATION	METER PER BOX	PIECES PER BOX	VOLUME (m3)
SBS-10050	100x50 PVC System Trunking Box Package	24	12	0,090
SBS-10035	100x35 PVC System Trunking Box Package	24	12	0,076
SBS-10052	100x50 Divider	140	70	0,041
SBS-10001	Internal Corner (Adjustable)	12	12	0,009
SBS-10002	External Corner (Adjustable)	10	10	0,009
SBS-10003	90° Corner Piece (L Corner)	12	12	0,009
SBS-10004	T Branches	12	12	0,009
SBS-10005	End Cover	24	24	0,009
SBS-10006	Junction Piece	24	24	0,009
SBS-10011	Mono Top Cover Set For 45x45 (2 Module)	12	12	0,009
SBS-10012	Double Top Cover Set For 45x45 (4 Module)	12	12	0,009
SBS-10013	Triple Top Cover Set For 45x45 (6 Module)	12	12	0,009
SBS-10014	Quadruple Top Cover Set For 45x45 (8 Module)	20	20	0,009

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Ham madde: PVC
Basınç dayanımı: 320 Nt/5cm
Darbe dayanımı: 2 Joule
Kullanım sıcaklığı: 25 to +65 C
Renk: Beyaz RAL 9010
 UV dayanımı
 Kolay montaj, boyanabilir, alev almaz
 Asit ve yağlara karşı dayanıklı
 Aşınmaya dayanıklı
 N 61386-21 - EN 61386-21 standartlarına göre üretilmiştir

Raw material: PVC
Compression resistance: 320 Nt/5cm
Impact resistance: 2 Joule
Operating temperature: -25 to +65 C
Colour: White RAL 9010
 UV resistant
 Easy install, paintable, non-flammable
 Resistant to acids, oils and greases
 Corrosion resistant
 Standards EN 61386-21 - EN 61386-21

"Elektrik Çözümlerinde
Güvenilir
Ortağınız"



MODÜLER SOKETLER

MODULER SOCKETS

MODULER SOCKETS

(MODÜLER SOKETLER)

CODE	INFORMATION	TOTAL PIECES PER PACKAGE	TOTAL PIECES PER BOX
SBS-2500150	45x45 mm Earthed Socket (45°)	50	500
SBS-2500151	45x45 mm Earthed Socket	50	500
SBS-2500152	45x45 mm UPS Socket (45°)	50	500
SBS-2500153	45x45 mm UPS Socket	50	500
SBS-2500154	45x45 mm Universal Socket	24	240
SBS-2500155	45x45 mm Data/Phone Cover (Mono)	40	400
SBS-2500156	45x45 mm Data/Phone Cover (Double)	40	400
SBS-2500157	45x22,5 mm Data/Phone Cover (Mono)	80	800
SBS-2500158	CAT 5E Data Socket	50	500
SBS-2500159	CAT 6E Data Socket	50	500
SBS-2500160	RJ11 Keystone Phone Socket	50	500
SBS-2500161	45x22,5 mm HDMI Socket	50	500
SBS-2500162	45x22,5 mm USB Socket	50	500
SBS-2500163	45x22,5 mm Double USB Charger Socket	30	300
SBS-2500164	45x22,5 mm VGA Socket	50	500



Hammadde: PE
Kolay kurulum, boyanabilir
Ekonomik ve uyarlanabilir
İletken olmayan
Yanıcı değil
Korozyona dayanıklı
Tel tipi mevcut
Beyaz, Turuncu ve
Siyah renkleri mevcuttur

Raw material: PE
Easy install, paintable
Economic and adaptable
Non-conductive
Nonflammable
Corrosion resistant
With wire type available
White, Orange and
Black colors available


GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)




KABLO KANALI

CABLE TRUNKING

PVC CABLE TRUNKING (PVC KABLO KANALI)

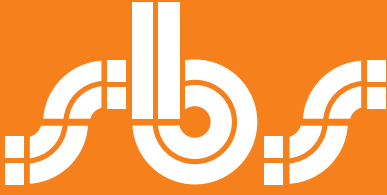

Each cable
Trunking pieces are
standart
2 meter

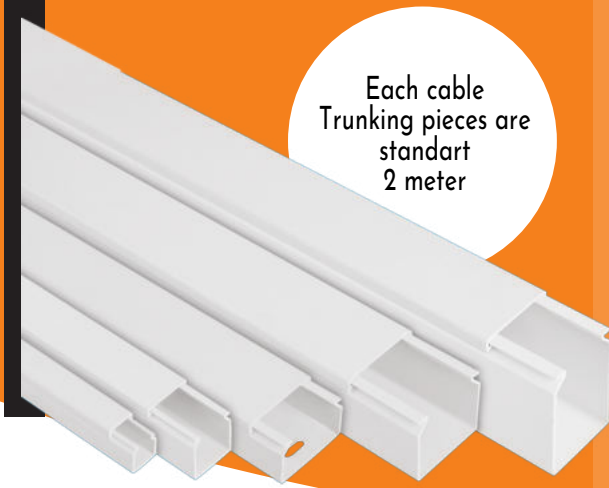

CODE	INFORMATION	BOX/PCS	BOX/PCS	VOLUME
SBS-1012012	12x12 PVC Cable Trunking Box Package	300	150	0,058
SBS-1015010	15x10 PVC Cable Trunking Box Package	288	144	0,058
SBS-1016016	16x16 PVC Cable Trunking Box Package	250	125	0,076
SBS-1020010	20x10 PVC Cable Trunking Box Package	200	100	0,058
SBS-1020013	20x13 PVC Cable Trunking Box Package	200	100	0,058
SBS-1020020	20x20 PVC Cable Trunking Box Package	156	73	0,076
SBS-1025016	25x16 PVC Cable Trunking Box Package	150	75	0,076
SBS-1025025	25x25 PVC Cable Trunking Box Package	100	50	0,076
SBS-1030016	30x16 PVC Cable Trunking Box Package	136	68	0,076
SBS-1040016	40x16 PVC Cable Trunking Box Package	100	50	0,076
SBS-1040025	40x25 PVC Cable Trunking Box Package	84	42	0,094
SBS-1040040	40x40 PVC Cable Trunking Box Package	50	25	0,094
SBS-1060025	60x25 PVC Cable Trunking Box Package	40	20	0,076
SBS-1060040	60x40 PVC Cable Trunking Box Package	40	20	0,090
SBS-1060060	60x60 PVC Cable Trunking Box Package	32	16	0,076
SBS-1080040	80x40 PVC Cable Trunking Box Package	36	18	0,076
SBS-1080060	80x60 PVC Cable Trunking Box Package	24	12	0,076
SBS-1080080	80x80 PVC Cable Trunking Box Package	18	9	0,128
SBS-1010040	100x40 PVC Cable Trunking Box Package	24	12	0,076
SBS-1010060	100x60 PVC Cable Trunking Box Package	24	12	0,094
SBS-1012060	120x60 PVC Cable Trunking Box Package	16	8	0,080

GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: PVC
Basıncı dayanımı: 320 Nt/5cm
Darbe dayanımı: 2 Joule
Kullanım sıcaklığı: 25 to +65 C
Renk: Beyaz RAL 9010
UV dayanımı
Kolay montaj, boyanabilir, alev almaz
Asit ve yağlara karşı dayanıklı
Aşınmaya dayanıklı
N 61386-21 - EN 61386-21 standartlarına göre üretilmiştir

Raw material: PVC
Compression resistance: 320 Nt/5cm
Impact resistance: 2 Joule
Operating temperature: -25 to +65 C
Colour: White RAL 9010
UV resistant
Easy install, paintable, non-flammable
Resistant to acids, oils and greases
Corrosion resistant
Standards EN 61386-21 - EN 61386-21

"Lighting Up
Innovation"



CABLE TRUNKING WITH ADHESIVE TAPE

PVC CABLE TRUNKING WITH ADHESIVE TAPE

(PVC KABLO KANALI YAPIŞKAN BANTLI)


CODE	INFORMATION	METER PER BOX	PIECES PER BOX	VOLUME (m3)
SBS-2012012	12x12 PVC Cable Trunking Adhesive Tape	300	150	0,058
SBS-2015010	15x10 PVC Cable Trunking Adhesive Tape	264	132	0,058
SBS-2016016	16x16 PVC Cable Trunking Adhesive Tape	250	125	0,046
SBS-2020010	20x10 PVC Cable Trunking Adhesive Tape	200	100	0,058
SBS-2020013	20x13 PVC Cable Trunking Adhesive Tape	201	101	0,058
SBS-2020020	20x20 PVC Cable Trunking Adhesive Tape	202	101	0,058
SBS-2025016	25x16 PVC Cable Trunking Adhesive Tape	150	75	0,076
SBS-2025025	25x25 PVC Cable Trunking Adhesive Tape	100	50	0,076
SBS-2030016	30x16 PVC Cable Trunking Adhesive Tape	136	68	0,076
SBS-2040016	40x16 PVC Cable Trunking Adhesive Tape	100	50	0,076
SBS-2040025	40x25 PVC Cable Trunking Adhesive Tape	84	42	0,094
SBS-2040040	40x40 PVC Cable Trunking Adhesive Tape	50	25	0,094
SBS-2060040	60x40 PVC Cable Trunking Adhesive Tape	40	20	0,090



GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: PVC
Basınç dayanımı: 320 Nt/5cm
Darbe dayanımı: 2 Joule
Kullanım sıcaklığı: 25 to +65 C
Renk: Beyaz RAL 9010
UV dayanımı
Kolay montaj, boyanabilir, alev almaz
Asit ve yağlara karşı dayanıklı
Aşınmaya dayanıklı
N 61386-21 - EN 61386-21 standartlarına göre üretilmiştir

Raw material: PVC
Compression resistance: 320 Nt/5cm
Impact resistance: 2 Joule
Operating temperature: -25 to +65 C
Colour: White RAL 9010
UV resistant
Easy install, paintable, non-flammable
Resistant to acids, oils and greases
Corrosion resistant
Standards EN 61386-21 - EN 61386-21

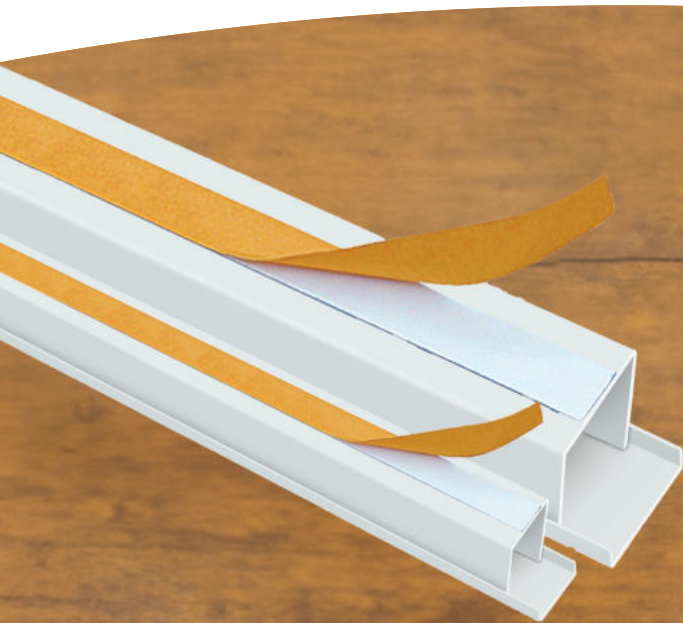

KABLO KANALI YAPIŞKAN BANTLI

PVC OVERFLOOR CABLE TRUNKING

(PVC BALIKSIRTI KABLO KANALI)



CODE	INFORMATION	METER PER BOX	PIECES PER BOX	1 PK M3
SBS-7050012	50x12 OverFloor PVC Cable Trunking	80	40	0,058
SBS-7070020	70x20 OverFloor PVC Cable Trunking	60	30	0,076
SBS-7090020	90x20 OverFloor PVC Cable Trunking	30	15	0,058
SBS-8050012	50x12 OverFloor PVC Cable Trunking Adhesive Tape	80	40	0,058
SBS-8070020	70x20 OverFloor PVC Cable Trunking Adhesive Tape	60	30	0,076
SBS-8090020	90x20 OverFloor PVC Cable Trunking Adhesive Tape	30	15	0,058


GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)

Hammadde: PVC
Basmaç dayanımı: 320 Nt/5cm
Darbe dayanımı: 2 Joule
Kullanım sıcaklığı: -25 °C to +65 °C
Renk: Beyaz RAL 9010

UV dayanımı
Kolay montaj, boyanabilir, alev almaz
Asit ve yağlara karşı dayanıklı
Aşınmaya dayanıklı
EN 61386-21 - EN 61386-21 standartlarına göre üretilmiştir

Raw material: PVC
Compression resistance: 320 Nt/5cm
Impact resistance: 2 Joule
Operating temperature: -25 °C to +65 °C
Colour: White RAL 9010
UV resistant
Easy install, paintable, non-flammable
Resistant to acids, oils and greases
Corrosion resistant
Standards EN 61386-21 - EN 61386-21


PVC RIGID PIPE (PVC RİJİD BORU)

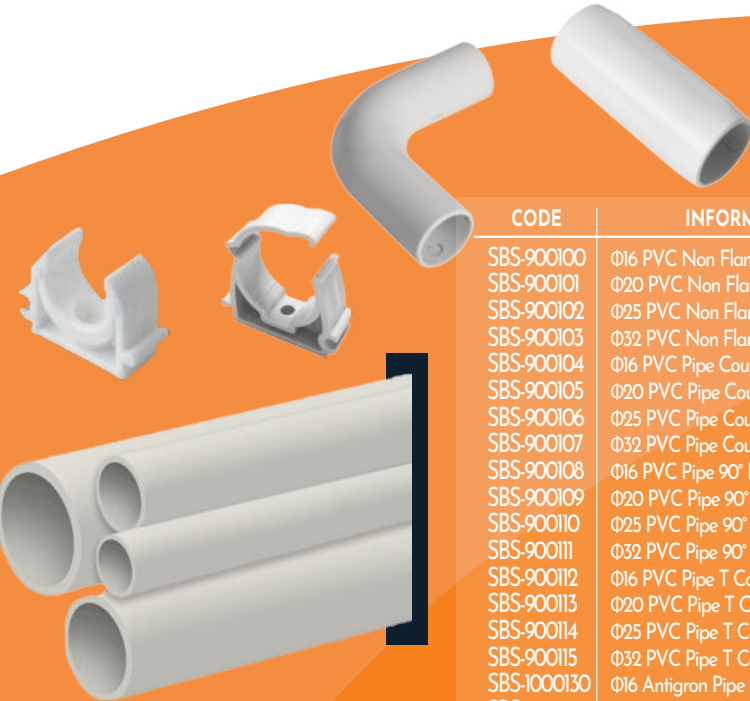

CODE	INFORMATION	METER PER BOX	PIECES PER BOX	1 PK M3	WEIGHT
SBS-900100	Ø16 PVC Non Flamable Pipe 3 Meters	102	34	0,040	12,3
SBS-900101	Ø20 PVC Non Flamable Pipe 3 Meters	102	34	0,051	16,4
SBS-900102	Ø25 PVC Non Flamable Pipe 3 Meters	75	25	0,068	17,8
SBS-900103	Ø32 PVC Non Flamable Pipe 3 Meters	36	12	0,087	18,2
SBS-900104	Ø16 PVC Pipe Coupling		100		
SBS-900105	Ø20 PVC Pipe Coupling		100		
SBS-900106	Ø25 PVC Pipe Coupling		100		
SBS-900107	Ø32 PVC Pipe Coupling		100		
SBS-900108	Ø16 PVC Pipe 90° Elbow		100		
SBS-900109	Ø20 PVC Pipe 90° Elbow		100		
SBS-900110	Ø25 PVC Pipe 90° Elbow		100		
SBS-900111	Ø32 PVC Pipe 90° Elbow		100		
SBS-900112	Ø16 PVC Pipe T Corner		100		
SBS-900113	Ø20 PVC Pipe T Corner		100		
SBS-900114	Ø25 PVC Pipe T Corner		100		
SBS-900115	Ø32 PVC Pipe T Corner		100		
SBS-1000130	Ø16 Antigron Pipe Straps		100		
SBS-1000131	Ø18 Antigron Pipe Straps		100		
SBS-1000132	Ø20 Antigron Pipe Straps		100		
SBS-1000133	Ø25 Antigron Pipe Straps		100		
SBS-1000134	Ø32 Antigron Pipe Straps		100		
SBS-1000136	Ø16 Antigron Pipe Straps Closed		50		
SBS-1000137	Ø20 Antigron Pipe Straps Closed		50		
SBS-1000138	Ø25 Antigron Pipe Straps Closed		50		
SBS-1000139	Ø32 Antigron Pipe Straps Closed		50		

PVC CABLE TRUNKING LIGNUM SERIES


(PVC KABLO KANALI LİGNUM SERİSİ)

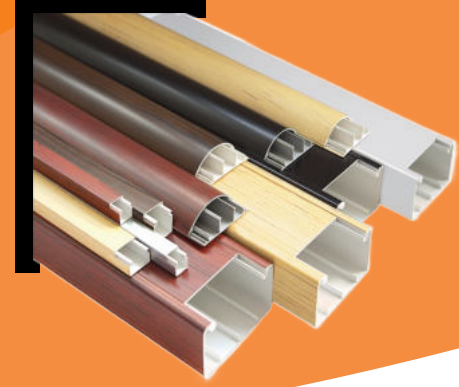


CODE	INFORMATION	TOTAL PIECES PER PACKAGE	TOTAL PIECES PER BOX	VOLUME (m3)
SBS-1012012-L	12x12 PVC Cable Duct Box Package	300	150	0,058
SBS-1015010-L	15x10 PVC Cable Duct Box Package	288	144	0,058
SBS-1016016-L	16x16 PVC Cable Duct Box Package	250	125	0,076
SBS-1020010-L	20x10 PVC Cable Duct Box Package	200	100	0,058
SBS-1020013-L	20x13 PVC Cable Duct Box Package	200	100	0,058
SBS-1020020-L	20x20 PVC Cable Duct Box Package	156	78	0,940
SBS-1025016-L	25x16 PVC Cable Duct Box Package	150	75	0,076
SBS-1025025-L	25x25 PVC Cable Duct Box Package	100	50	0,076
SBS-1030016-L	30x16 PVC Cable Duct Box Package	136	68	0,076
SBS-1040016-L	40x16 PVC Cable Duct Box Package	100	50	0,076
SBS-1040025-L	40x25 PVC Cable Duct Box Package	84	42	0,094
SBS-1040040-L	40x40 PVC Cable Duct Box Package	50	25	0,094
SBS-1060025-L	60x25 PVC Cable Duct Box Package	40	20	0,076
SBS-1060040-L	60x40 PVC Cable Duct Box Package	40	20	0,090
SBS-1060060-L	60x60 PVC Cable Duct Box Package	32	16	0,076
SBS-1080040-L	80x40 PVC Cable Duct Box Package	36	18	0,076
SBS-1080060-L	80x60 PVC Cable Duct Box Package	24	12	0,076
SBS-1080080-L	80x80 PVC Cable Duct Box Package	18	9	0,128
SBS-1010040-L	100x40 PVC Cable Duct Box Package	24	12	0,076
SBS-1010060-L	100x60 PVC Cable Duct Box Package	24	12	0,094
SBS-1012060-L	120x60 PVC Cable Duct Box Package	16	8	0,080
SBS-10050-L	100x50 PVC System Duct Box Package	24	12	0,090
SBS-10035-L	100x35 PVC System Duct Box Package	24	12	0,076
SBS-10052-L	100x50 Divider	140	70	0,041
SBS-10001-L	Internal Corner (Adjustable)	12	12	0,009
SBS-10002-L	External Corner (Adjustable)	10	10	0,009
SBS-10003-L	90° Corner Piece (L Corner)	12	12	0,009
SBS-1004-L	T Branches	12	12	0,009
SBS-1005-L	End Cover	24	24	0,009
SBS-10006-L	Junction Piece	24	24	0,009
SBS-10011-L	Mono Top Cover Set For 45x45 (2 Module)	12	12	0,009
SBS-10012-L	Double Top Cover Set For 45x45 (4 Module)	12	12	0,009
SBS-10013-L	Triple Top Cover Set For 45x45 (6 Module)	12	12	0,009
SBS-10014-L	Quadruple Top Cover Set For 45x45 (8 Module)	20	20	0,009
SBS-2012012-L	12x12 PVC Cable Duct Adhesive Tape	300	150	0,058
SBS-2015010-L	15x10 PVC Cable Duct Adhesive Tape	264	132	0,058
SBS-2016016-L	16x16 PVC Cable Duct Adhesive Tape	250	125	0,046
SBS-2020010-L	20x10 PVC Cable Duct Adhesive Tape	200	100	0,058
SBS-2020013-L	20x13 PVC Cable Duct Adhesive Tape	201	101	0,058
SBS-2020020-L	20x20 PVC Cable Duct Adhesive Tape	202	101	0,058
SBS-2025016-L	25x16 PVC Cable Duct Adhesive Tape	150	75	0,076
SBS-2025025-L	25x25 PVC Cable Duct Adhesive Tape	100	50	0,076
SBS-2030016-L	30x16 PVC Cable Duct Adhesive Tape	136	68	0,076
SBS-2040016-L	40x16 PVC Cable Duct Adhesive Tape	100	50	0,076
SBS-2040025-L	40x25 PVC Cable Duct Adhesive Tape	84	42	0,094
SBS-2040040-L	40x40 PVC Cable Duct Adhesive Tape	50	25	0,094
SBS-2060040-L	60x40 PVC Cable Duct Adhesive Tape	40	20	0,090
SBS-7050012-L	50x12 OverFloor PVC Cable Duct	80	40	0,058
SBS-7070020-L	70x20 OverFloor PVC Cable Duct	60	30	0,076
SBS-7090020-L	90x20 OverFloor PVC Cable Duct	30	15	0,058
SBS-8050012-L	50x12 OverFloor PVC Cable Duct Adhesive Tape	80	40	0,058
SBS-8070020-L	70x20 OverFloor PVC Cable Duct Adhesive Tape	60	30	0,076
SBS-8090020-L	90x20 OverFloor PVC Cable Duct Adhesive Tape	30	15	0,058

Colour Options

Renk Seçenekleri



Gümüş / Silver



Siyah / Black




Kayın / Beech




Maun / Mahogany



Ceviz / Walnut

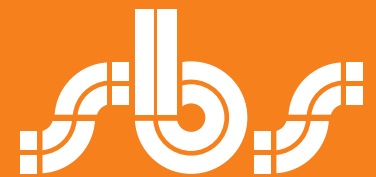

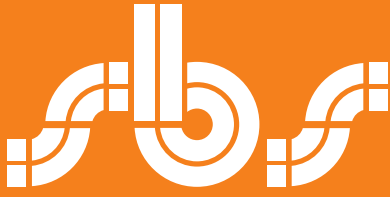

FUSE BOX

(PLASTİK SİGORTA KUTUSU)



CODE	INFORMATION	BOX/PCS	VOLUME (m3)	WEIGHT
SBS-1100226	1-2 Modul Surface Distribution Boxes With Lock	40	0,12	14,80
SBS-1100227	3-4 Modul Surface Distribution Boxes With Lock	25	0,02	2,70
SBS-1100228	2 Modul Surface Distribution Boxes	30	0,05	7,20
SBS-1100230	6 Modul Surface Distribution Boxes	30	0,09	10,80
SBS-1100231	9 Modul Surface Distribution Boxes	30	0,14	15,00
SBS-1100232	12 Modul Surface Distribution Boxes	20	0,14	14,30
SBS-1100233	16 Modul Surface Distribution Boxes	20	0,15	16,30
SBS-1100234	24 Modul Surface Distribution Boxes	10	0,11	11,70
SBS-1100235	36 Modul Surface Distribution Boxes	10	0,16	16,20
SBS-1100250	2 Modul Flush Mount Distribution Boxes	30	0,05	6,20
SBS-1100252	6 Modul Flush Mount Distribution Boxes	30	0,09	10,00
SBS-1100253	9 Modul Flush Mount Distribution Boxes	30	0,14	13,80
SBS-1100254	12 Modul Flush Mount Distribution Boxes	20	0,14	13,20
SBS-1100255	16 Modul Flush Mount Distribution Boxes	20	0,15	15,40
SBS-1100256	24 Modul Flush Mount Distribution Boxes	10	0,11	11,20
SBS-1100257	36 Modul Flush Mount Distribution Boxes	10	0,16	16,20

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)



Hammadde: ABS
 Kalite Standardı: EN 61439-1, EN 61439-2
 Renk: RAL 9010
 Çalışma Sıcaklığı: -15°C / +60°C
 Kapak Açılma Açısı: 180°
 Koruma Sınıfı: IP40
 Isı Dayanımı: 650 °C'ye kadar
 Yalıtım Sınıfı: Class II
 Otomat Rayı: Galvaniz Çelik
 Paslanmaz, boyaya
 gerek yoktur
 Elektrik yalıtımlıdır,
 güvenlidir
 Geniş iç hacime sahip,
 özel tasarımıdır
 Topraklama klemensi
 içerisinde mevcuttur

Raw material: ABS
 Quality Standard: EN 61439-1, EN 61439-2
 Colour: RAL 9010
 Operating Temperature: -15°C / +60°C
 Door Opening Angle: 180°
 Protection Class: IP40
 Fire Resistance: Up to 650 °C
 Insulating Class: Class II
 Circuit Breaker Rail: Galvanised Steel
 Rustproof, no need painting
 and maintenance
 Dielectric, safety
 Wide internal space,
 selected designs
 Equipped with earthing
 and installation
 accessories

"Sınırları ve
Standartları
Aşıyoruz"



CABLE TIE

(KABLO BAĞI)

CODE	INFORMATION	PIECES PER BOX	CLAMPING DIAMETER	PACKAGE PER BOX
SBS-2301325	25X100 Cable Ties	50000	24	100
SBS-2301326	25X150 Cable Ties	40000	40	100
SBS-2301327	25X200 Cable Ties	25000	55	100
SBS-2301328	36X150 Cable Ties	25000	40	100
SBS-2301329	36X200 Cable Ties	20000	55	100
SBS-2301330	36X250 Cable Ties	18000	68	100
SBS-2301331	36X300 Cable Ties	17000	82	100
SBS-2301332	36X370 Cable Ties	15000	102	100
SBS-2301333	48X200 Cable Ties	18000	55	100
SBS-2301334	48X250 Cable Ties	15000	68	100
SBS-2301335	48X300 Cable Ties	14000	82	100
SBS-2301336	48X380 Cable Ties	12000	110	100
SBS-2301337	48X450 Cable Ties	9000	130	100
SBS-2301339	80X300 Cable Ties	6000	160	100
SBS-2301340	80X380 Cable Ties	5000	82	100
SBS-2301341	80X450 Cable Ties	4500	110	100
SBS-2301342	80X550 Cable Ties	3000	166	100
SBS-2301343	80X650 Cable Ties	2500	192	100
SBS-2301344	80X750 Cable Ties	2500	235	100



GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)


Ham madde: NYLON 66 Halogen Free
 Kalite standardı: UL94 and V-2
 Kullanım Sıcaklığı: -40°C to +85°C
 Maks. Elektrik Akım Dayanımı: 800A'e kadar
 RoHS standartlarına göre üretilmiştir

Raw material: NYLON 66 Halogen Free
 Quality Standard: UL94 and V-2
 Operating Temperature: -40°C to +85°C
 Maximum Electric Current: Up to 800A
 Manufactured for RoHS standards



SOFT HOSE

YUMUŞAK HORTUM

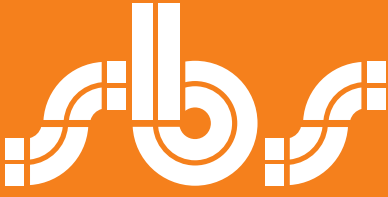

PVC SOFT HOSE

(PVC YUMUŞAK ELEKTRİK HORTUMU)

CODE	INFORMATION	METER PER ROLE
SBS-1800100	8 mm PVC Soft Hose	30
SBS-1800101	10 mm PVC Soft Hose	30
SBS-1800102	12 mm PVC Soft Hose	30
SBS-1800103	14 mm PVC Soft Hose	30
SBS-1800104	16 mm PVC Soft Hose	30
SBS-1800105	18 mm PVC Soft Hose	30
SBS-1800106	20 mm PVC Soft Hose	30
SBS-1800107	22 mm PVC Soft Hose	30
SBS-1800108	25 mm PVC Soft Hose	30
SBS-1800109	28 mm PVC Soft Hose	30
SBS-1800110	32 mm PVC Soft Hose	30
SBS-1800111	35 mm PVC Soft Hose	30
SBS-1800112	38 mm PVC Soft Hose	30
SBS-1800113	40 mm PVC Soft Hose	30
SBS-1800114	50 mm PVC Soft Hose	30

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Ham madde: PVC
Kullanım Sıcaklığı: -5°C to +65°C
Hafif ve esnek malzeme
Kimyasal ve neme karşı dayanıklı
Küçük ve toz halindeki malzemelerin taşınması için pürüzsüz iç yüzey

Raw material: PVC
Operating Temperature: -5°C to +65°C
Light weight and flexible
Chemical and moisture resistant
Smooth interior to transit small and powder materials


"Wiring the Future,
Safely and
Efficiently"



STEEL CONDUIT

(ÇELİK SPİRAL)

CODE	INFORMATION	TOTAL METER PER ROLL
SBS-2401425	9 mm Steel Conduit	50
SBS-2401426	11 mm Steel Conduit	50
SBS-2401427	14 mm Steel Conduit	50
SBS-2401428	16 mm Steel Conduit	50
SBS-2401429	18 mm Steel Conduit	50
SBS-2401430	21 mm Steel Conduit	50
SBS-2401431	26 mm Steel Conduit	25
SBS-2401432	29 mm Steel Conduit	25
SBS-2401433	32 mm Steel Conduit	25
SBS-2401434	35 mm Steel Conduit	25
SBS-2401435	37 mm Steel Conduit	25
SBS-2401436	40 mm Steel Conduit	25
SBS-2401437	50 mm Steel Conduit	25
SBS-2401438	63 mm Steel Conduit	15
SBS-2401475	9 mm PVC Covered Steel Conduit	50
SBS-2401476	11 mm PVC Covered Steel Conduit	50
SBS-2401477	14 mm PVC Covered Steel Conduit	50
SBS-2401478	16 mm PVC Covered Steel Conduit	50
SBS-2401479	18 mm PVC Covered Steel Conduit	50
SBS-2401480	21 mm PVC Covered Steel Conduit	50
SBS-2401481	26 mm PVC Covered Steel Conduit	25
SBS-2401482	29 mm PVC Covered Steel Conduit	25
SBS-2401483	32 mm PVC Covered Steel Conduit	25
SBS-2401484	35 mm PVC Covered Steel Conduit	25
SBS-2401485	37 mm PVC Covered Steel Conduit	25
SBS-2401486	40 mm PVC Covered Steel Conduit	25
SBS-2401487	50 mm PVC Covered Steel Conduit	25
SBS-2401488	63 mm PVC Covered Steel Conduit	15

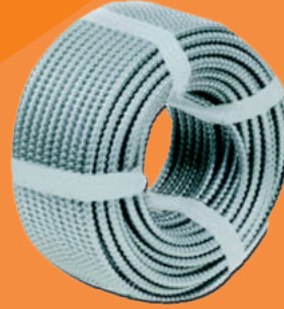

Hammadde: Galvaniz Çelik
Başınc Dayanımı: 320 N / 60 Sec
Çalışma Sıcaklığı: -20°C to +70°C
IP Koruması: IP65
 Plastik malzemelere göre daha dayanıklı
 Yüksek esneklik ve bükülebilirlik
 Sıvı ve kimyasallara dayanıklı
 Korozyona dayanıklı
 Kablo koyucu

Raw material: Galvanised Steel
Compression resistance: 320 N / 60 Sec
Operating temperature: -20°C to +70°C
IP Protection: IP65
 Higher compression, mechanical and tensile strength than plastic systems
 Highly flexible, tight bend radius
 Liquid and chemical resistance
 High resistance to corrosion
 Protects Cables and Wires

GENERAL SPESIFICATIONS (GENEL ÖZELLİKLER)

PLASTIC POLYTHENE CONDUIT

(PLASTİK SPİRAL)

CODE	INFORMATION	TOTAL METER PER ROLL
SBS-1900825	Ø12 Polythene Conduit Black	100
SBS-1900825-1	Ø14 Polythene Conduit Black	100
SBS-1900826	Ø16 Polythene Conduit Black	100
SBS-1900827	Ø18 Polythene Conduit Black	100
SBS-1900828	Ø20 Polythene Conduit Black	100
SBS-1900829	Ø25 Polythene Conduit Black	50
SBS-1900830	Ø32 Polythene Conduit Black	50





TERMINAL BLOCKS

(SIRALI KLEMENS)

CODE	INFORMATION	TOTAL PIECES PER BOX	PACKAGE PER BOX
SBS-440000101	Plastic Terminal Strips NO1/ 10 AMP/ 25-4 mm ²	1000	500
SBS-440000102	Plastic Terminal Strips NO2/ 16 AMP/ 4-6 mm ²	1000	500
SBS-440000103	Plastic Terminal Strips NO3/ 25 AMP/ 10-16 mm ²	600	500
SBS-440000104	Plastic Terminal Strips NO4/ 32 AMP/ 16-25 mm ²	600	500
SBS-440000105	High Temperature Resistant Plastic Terminal Strips NO1/ 10 AMP/ 25-4 mm ²	1000	500
SBS-440000106	High Temperature Resistant Plastic Terminal Strips NO2/ 16 AMP/ 4-6 mm ²	1000	500
SBS-440000107	High Temperature Resistant Plastic Terminal Strips NO3/ 25 AMP/ 10-16 mm ²	600	500
SBS-440000108	High Temperature Resistant Plastic Terminal Strips NO4/ 32 AMP/ 16-25 mm ²	600	500

GENERAL SPECIFICATIONS (GENEL ÖZELLİKLER)

Ham madde: PC / (Polycarbonate)
Kalite standardı: EN60664
Kullanım Sıcaklığı: -5°C to +85°C
Yanmazlık standardı: UL94 and V-2
 Kompakt Boyut
 Hızlı ve kolay kullanım
 Elektrik panolarında ve
 binalarda düzenli
 kablolama rahatlığı
 Montajsız kurulum
 Kalıcı ve güvenli bağlantı



Raw material: PC / (Polycarbonate)
Quality Standard: EN60664
Operating Temperature: -5°C to +85°C
Flammability Standard: UL94 and V-2
 Compact Size
 Fast and easy to use
 Clearly organized wiring in
 control cabinets and
 junction boxes
 Maintenance-free installation
 Permanent, secure connections


WIRE CONNECTORS

(GEÇMELİ KLEMENS)



CODE	INFORMATION	TOTAL PIECES PER BOX	PACKAGE PER BOX
SBS-440000110	Compact Splicing Connector - 2 Conductor	10000	200
SBS-440000111	Compact Splicing Connector - 3 Conductor	10000	200
SBS-440000112	Compact Splicing Connector - 4 Conductor	5000	100
SBS-440000113	Compact Splicing Connector - 5 Conductor	5000	100
SBS-440000114	Compact Splicing Connector - 6 Conductor	5000	100
SBS-440000115	Compact Splicing Connector - 8 Conductor	5000	100
SBS-440000116	Compact Pushwire Connector - 2 Conductor	5000	100
SBS-440000117	Compact Pushwire Connector - 3 Conductor	5000	100
SBS-440000118	Compact Pushwire Connector - 4 Conductor	2500	50
SBS-440000119	Compact Pushwire Connector - 5 Conductor	2500	50

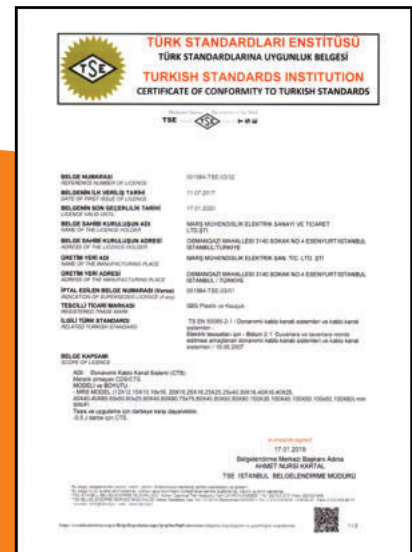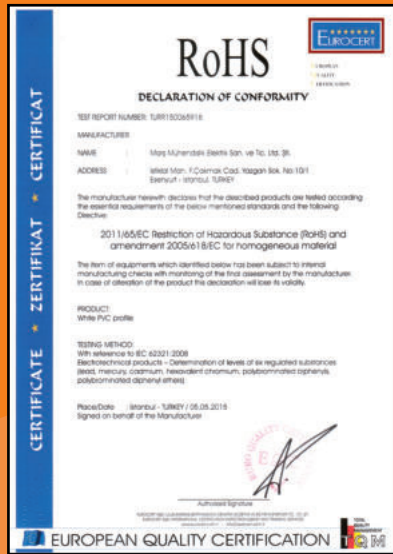

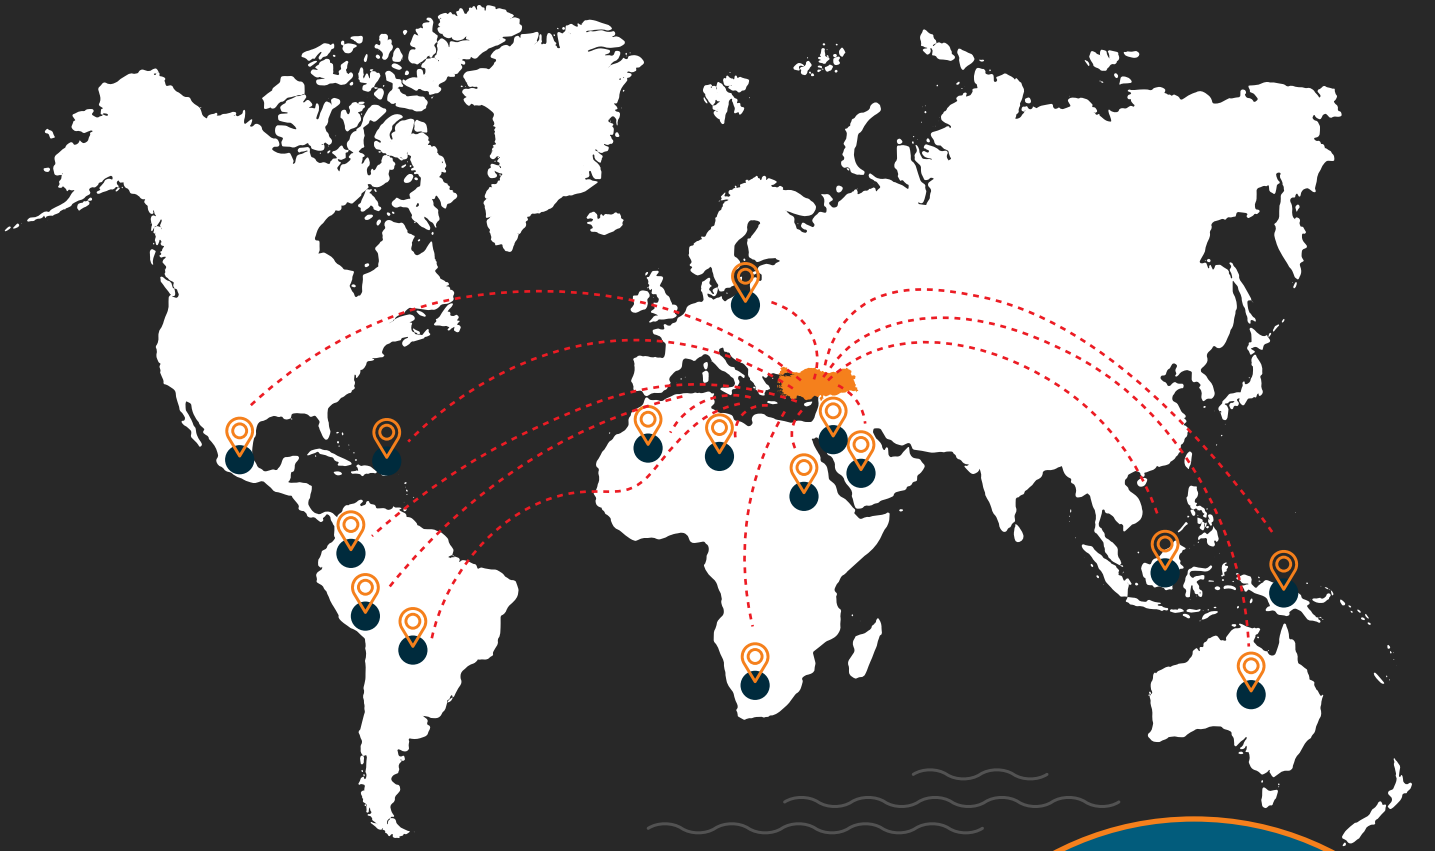

"Global Quality,
Local Craftsmanship"

Marş Mühendislik Elk. San. ve Tic. Ltd. Şti.

Phone:

+90 0212 549 77 33

Mail:

info@sbstrunking.com

Address:

Osmangazi Mahallesi
3140 Sokak No: 4
Esenyurt - İstanbul

2024

ÜRÜN KATALOĞU
PRODUCT CATALOGUE



PLASTIC & ELECTRIC

www.sbstrunking.com

"Dünya Standartlarında
Türkiye Kalitesi"